

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000753

International filing date: 01 March 2005 (01.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0405124.9
Filing date: 08 March 2004 (08.03.2004)

Date of receipt at the International Bureau: 01 April 2005 (01.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



GB05/753



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

17 March 2005

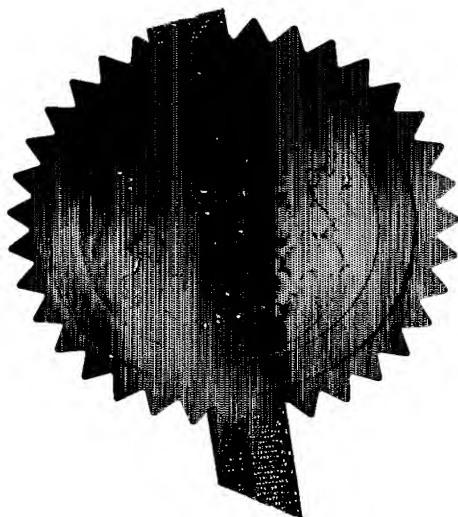

Patents Form 1/77



The Patent Office
Cardiff Road
Newport
NP9 1RH

Request for grant of a patent

00HAR04 E878986-1 D02846
P01/7700 0.00-0405124.9 ACCOUNT CHA

1. Your Reference	PLB/SLH/Y2496		
2. Application number	0405124.9		
3. Full name, address and postcode of the or each Applicant	Burnden Holdings (UK) Limited Burnden Works Burnden Road Bolton BL2 2RB		
Country/state of Incorporation (if applicable)	08567422002 Incorporated in: England & Wales		
4. Title of the invention	Improvements In and Relating to Extrusion Apparatus and Adapters Therefor		
5. Name of agent	APLEYARD LEES		
Address for service in the UK to which all correspondence should be sent	15 CLARE ROAD HALIFAX HX1 2HY		
Patents ADP number	190001 ✓		
6. Priority claimed to:	Country	Application number	Date of filing
7. Divisional status claimed from:	Number of parent application		Date of filing
8. Is a statement of inventership and of right to grant a patent required in support of this application?	YES		

Patents Form 1/77

Page 2/2

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

9 ✓

Claim(s)

Abstract

Drawing(s)

6 ✓

10. If you are also filing any of the following, state how many against each item

Priority documents

Translation of priority documents

Statement of inventorship and right to grant a patent (PF 7/77)

Request for a preliminary examination and search (PF 9/77)

Request for substantive examination (PF 10/77)

Any other documents (please specify)

11.

We request the grant of a patent on the basis of this application.
Signature _____ Date _____

APPLEYARD LEES

08 March 2004

Appleyard Lees

12. Contact

Paul Brandon - 0161 835 9655

**Improvements In and Relating to Extrusion Apparatus and
Adapters Therefor**

Field of the Invention

5

The present invention relates to adapters for extrusion apparatus, to extrusion apparatus incorporating such adapters and to methods of operating extrusion apparatus.

10 **Background to the Invention**

A typical plastics extrusion apparatus will operate at 400 Bar pressure and a typical temperature of 200°C. It is clearly desirable to maximise the efficient use of such
15 extrusion apparatus bearing in mind its capital cost and ongoing running expenses. One known option for doing so is the provision of so-called Y-adapters which enable a single flow of molten material to be split into two equal flows to pass through substantially identical dies. The
20 Y-adapter is fitted to the output of an extrusion apparatus.

This works satisfactorily for large scale production. However, if the maximum output of an extrusion apparatus
25 exceeds the amount desired, maximum efficiency cannot be obtained. A dual-line extruder cannot be used for different dies because the flows have to be balanced. That is, an equal amount of molten material flows along each output channel of a known Y-adapter. If such an
30 adapter is used with dies of different aggregate cross-sectional area, only the flow rate suitable for the lower flow rate die can be used. Accordingly, for reasons of efficiency, this is not done.

Another problem with known extrusion apparatus is the amount of space they take up, especially if a Y-adapter is used.

5

It is an aim of preferred embodiments of the present invention to provide an adapter for an extrusion apparatus and a corresponding extrusion apparatus and method of operation that addresses one or both sides of these
10 problems.

Summary of the Invention

According to the present invention in a first aspect,
15 there is provided an adapter for an extrusion apparatus to split the flow of a molten material into a plurality of extrusion pathways, which adapter comprises an input channel, a first output channel, a second output channel and means for adjusting the flow balance between the first
20 output channel and the second output channel.

Suitably, the adapter comprises means for attachment to an extruder.

25 Suitably, the flow balance adjusting means is capable of controlling the flow balance to achieve at least a 60:40 split between the first channel and the second channel.

Suitably, at the output of the first channel there is
30 provided a first die and the output of the second channel there is provided a second die, wherein the first and second dies differ substantially from one another.

Suitably, the flow balance adjusting means comprises a physical block restricting the flow of molten material into a channel.

5 Suitably, the flow balance adjusting means comprises a bellows.

Suitably, the flow balance adjusting means comprises a pivotable arm.

10

Suitably, the flow balance adjusting means comprises magnet means for biasing the flow of a polar molten material.

15 Suitably, the first output channel is vertically spaced from the second output channel. Suitably, the first output channel lies above the second output channel.

According to the present invention in a second aspect
20 there is provided an extrusion apparatus comprising an output to split the flow of a molten material into a plurality of extrusion pathways, which output comprises a first output channel, a second output channel and means for adjusting the flow balance between the first output
25 channel and the second output channel.

Suitably, the first output channel is vertically spaced from the second output channel. Suitably, the first output channel lies above the second output channel.

30

Suitably, the output comprises an adapter according to the first aspect of the present invention.

According to the present invention in a third aspect,
there is provided a method of operating an extrusion
apparatus according to the second aspect of the present
invention, which method comprises the steps of adjusting
5 the flow balance adjusting means to balance the flow of
molten material between a first dye of the first output
channel and a second dye of the second output channel.

According to the present invention in a fourth aspect,
10 there is provided an adapter for splitting the flow of a
molten extrudate into a plurality of channels, the first
channel having a first output channel and a second channel
having a second output channel, wherein the first output
channel is vertically spaced from the second output
15 channel.

Suitably, the first output channel lies above the second
output channel. Suitably the adapter is according to the
first aspect of the present invention.

20

According to the present invention in a fifth aspect,
there is provided an extrusion apparatus comprising an
adapter according to the fourth aspect of the present
invention.

25

Suitably, the first output channel is above the second
output channel.

Brief Description of the Drawings

30

The present invention will now be described, by way of
example only, with reference to the drawings that follow;
in which:

Figure 1 is a schematic perspective illustration of an adapter according to an embodiment of the present invention.

5

Figure 2 is a cross-sectional elevation through the adapter of Figure 1 on the line II-II.

Figure 3 is a schematic side elevation of an extrusion apparatus incorporating an adapter according to the present invention.

15

Figure 4 is a schematic illustration similar to Figure 2 of a second embodiment of the present invention.

Figure 5 is a schematic illustration similar to Figure 2 of a third embodiment of the present invention.

Figure 6 is a view corresponding to Figure 3 of a further embodiment of the present invention.

Description of the Preferred Embodiments

Referring to Figures 1-3 of the drawings that follow there is shown an adapter 2 according to an embodiment of the present invention. The adapter 2 is attached to the output of an extrusion apparatus 4 (see Figure 3) of known configuration.

The adapter 2 comprises a generally Y-shaped main body 6 having an input 8 and two outputs 10, 12. About the input 8 is a fitting ring 14 for connecting the adapter 2 to the extrusion apparatus 4. At the output 10, 12 are located

two different dies 16, 18 for shaping a molten material into an extrudate.

Within the main body 6 of adapter 2 there is an input
5 channel 20 leading to a first output channel 22 and a second output channel 24, terminating in outputs 10, 12, respectively. In the input channel 20 is provided a flow balance adjusting means 26 controlled by controller 28.

10 The flow balance adjusting means 26 can take many different forms. As shown in Figure 2, there is provided a paddle arm 30 pivoting at the juncture of the first and second output channels 22, 24, respectively. Alternatively, a paddle arm could be provided pivoting at
15 the other end thereof (i.e. upstream).

Referring to Figure 4 of the drawings that follow, a similar construction is shown to that described in relation to Figures 1-3 with a different flow balance
20 adjusting means 30. In this embodiment, the flow balance adjusting means comprises an inflatable bellows pair 32, 34 that can be independently inflated by a working fluid, typically a liquid to adjust the flow of molten material between the output channels 22, 24.

25

Referring to Figure 5 of the drawings that follow, in a yet further embodiment of the present invention a flow balance adjusting means 36 comprises a high powered magnet which can be used for certain polar polymeric materials
30 (such as poly vinyl chloride) to controllably adjust the flow between the two output channels 22, 24.

As a yet further option for a flow balance adjusting means, a belt for a temperature controlled liquid flow, e.g. oil, can be provided about each channel 22, 24. In this case the means 36 of Figure 5 are replaced by such an oil belt and appropriate control means. By independently controlling the liquid flow temperature in each belt, the viscosity and hence flow rate in each channel can be controllably adjusted.

By adjusting the flow between the two output channels, the necessary balance between them can be maintained even though their outputs differ substantially. While it is desirable to be able to achieve a 0% to 100% alteration of the flow balance between the first and second outputs, achieving at least a 60:40 flow ratio between the two output channels can accommodate most requirements.

Referring to Figure 6 of the drawings that follow, there is shown another embodiment of the present invention that can be used with or without the Y-adapter of the other embodiments. In this case there is provided an extrusion apparatus 100 comprising a fitting ring 102 and a Y-adapter 104 (as described above or otherwise), which Y-adapter is configured to be attachable and is attached to the fitting ring 102 whereby a first extrusion outlet 106 of the Y-adapter 104 is vertically spaced from a second extrusion outlet 108 of the Y-adapter 104. Preferably the first extrusion outlet 106 is above (i.e. at least partly vertically in line with) the second extrusion outlet 108. According to such an embodiment, there is a reduced footprint for the extrusion apparatus.

In use, the flow balance adjustment means is used to adjust the ratio of flow of molten material between the two output channels so that the maximum throughput can be achieved through substantially different dies. The amount
5 of bias between the two channels is determined by iteratively adjusting the flow balance until a suitable flow rate differential is achieved.

Although described in relation to a two channel adapter,
10 it will be appreciated that the present invention is applicable in multi-channel adapter applications also.

Accordingly, two different existing dies can be used on an adapter providing two or more outputs from an extrusion
15 apparatus. The invention can be embodied in an extrusion apparatus comprising an extruder output with two or more channels that is not an adapter.

Attention is directed to all papers and documents which
20 are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.

25 All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination,
30 except combinations where at least some of such features and/or steps are mutually exclusive.

Each feature disclosed in this specification (including any accompanying claims, abstract and drawings) may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated
5 otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

The invention is not restricted to the details of the
10 foregoing embodiment(s). The invention extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any
15 method or process so disclosed.

1/6

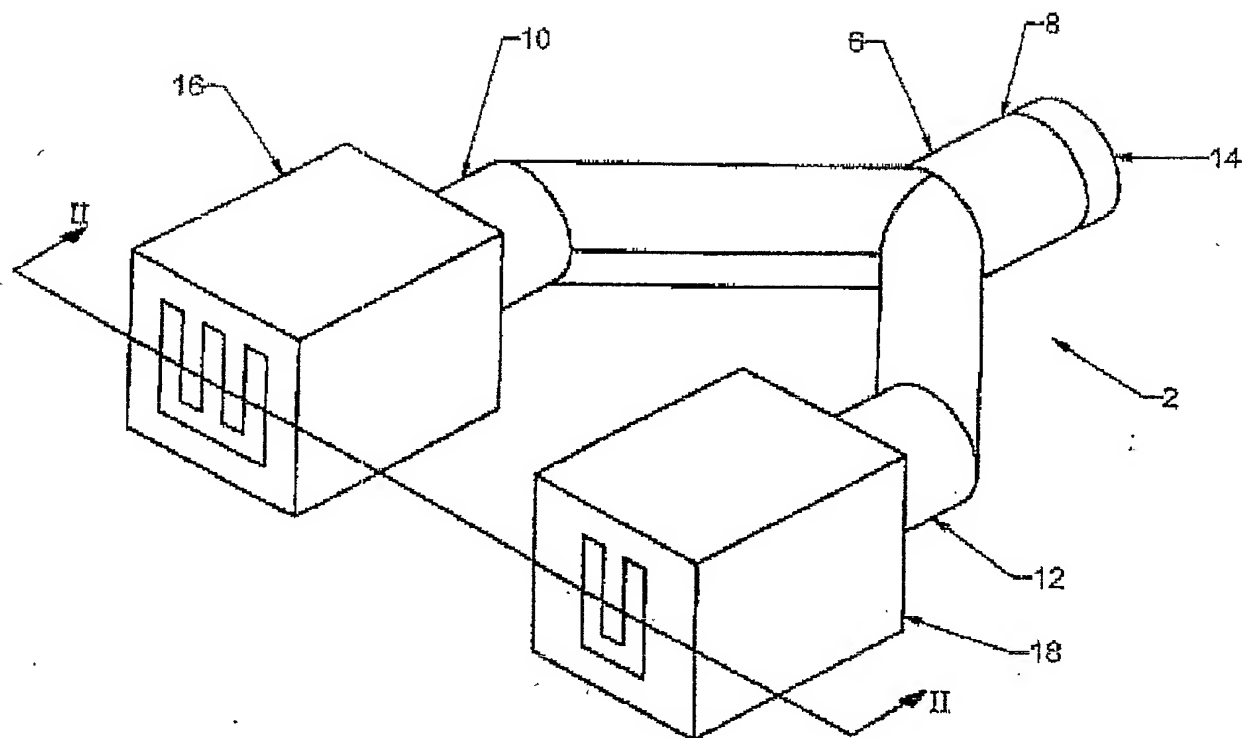


Fig. 1

2/6

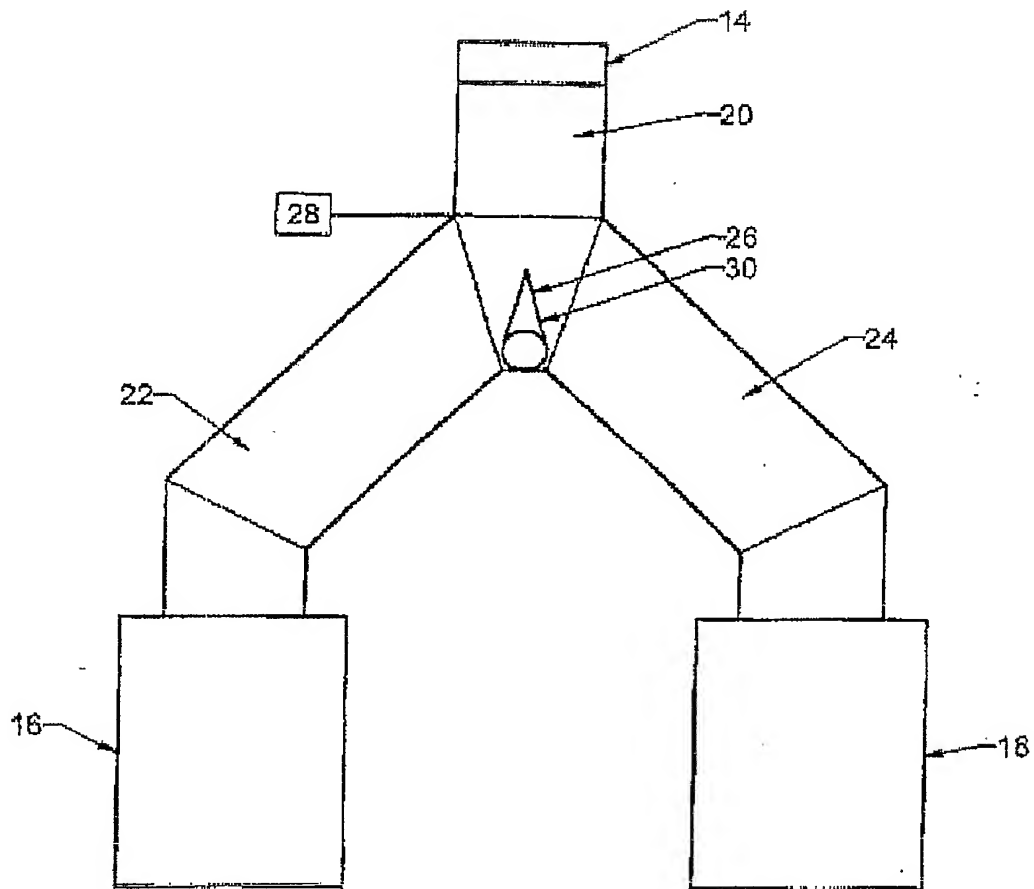


Fig. 2

3/6

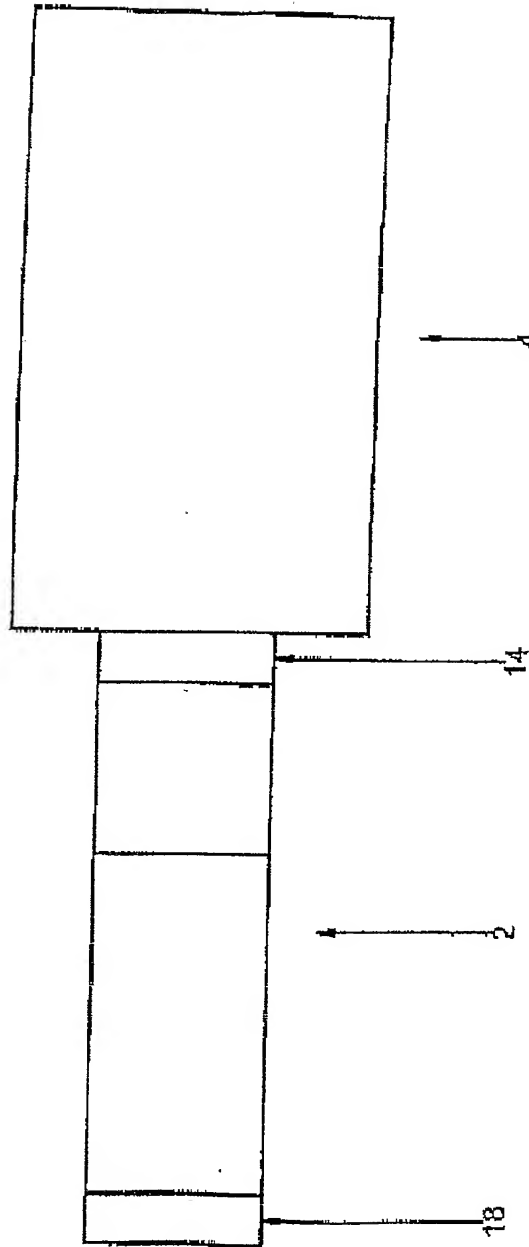


Fig. 3

4/6

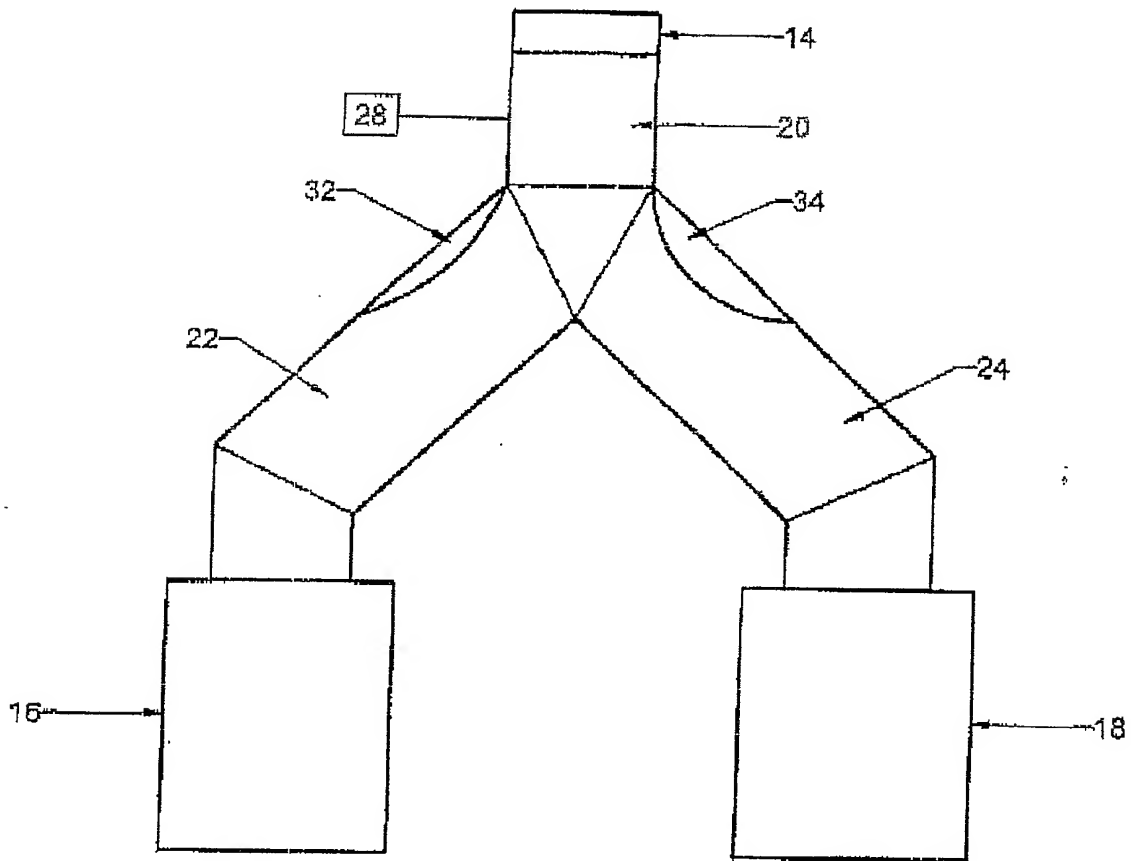


Fig. 4

5/6

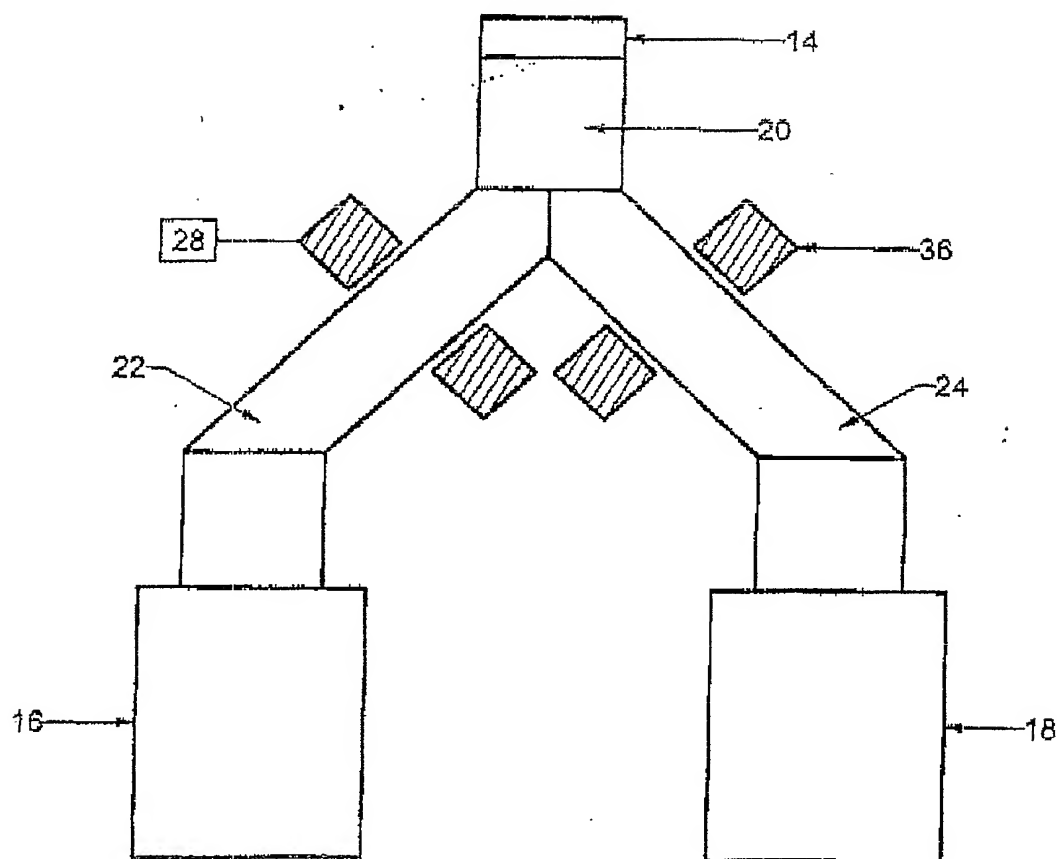


Fig. 5

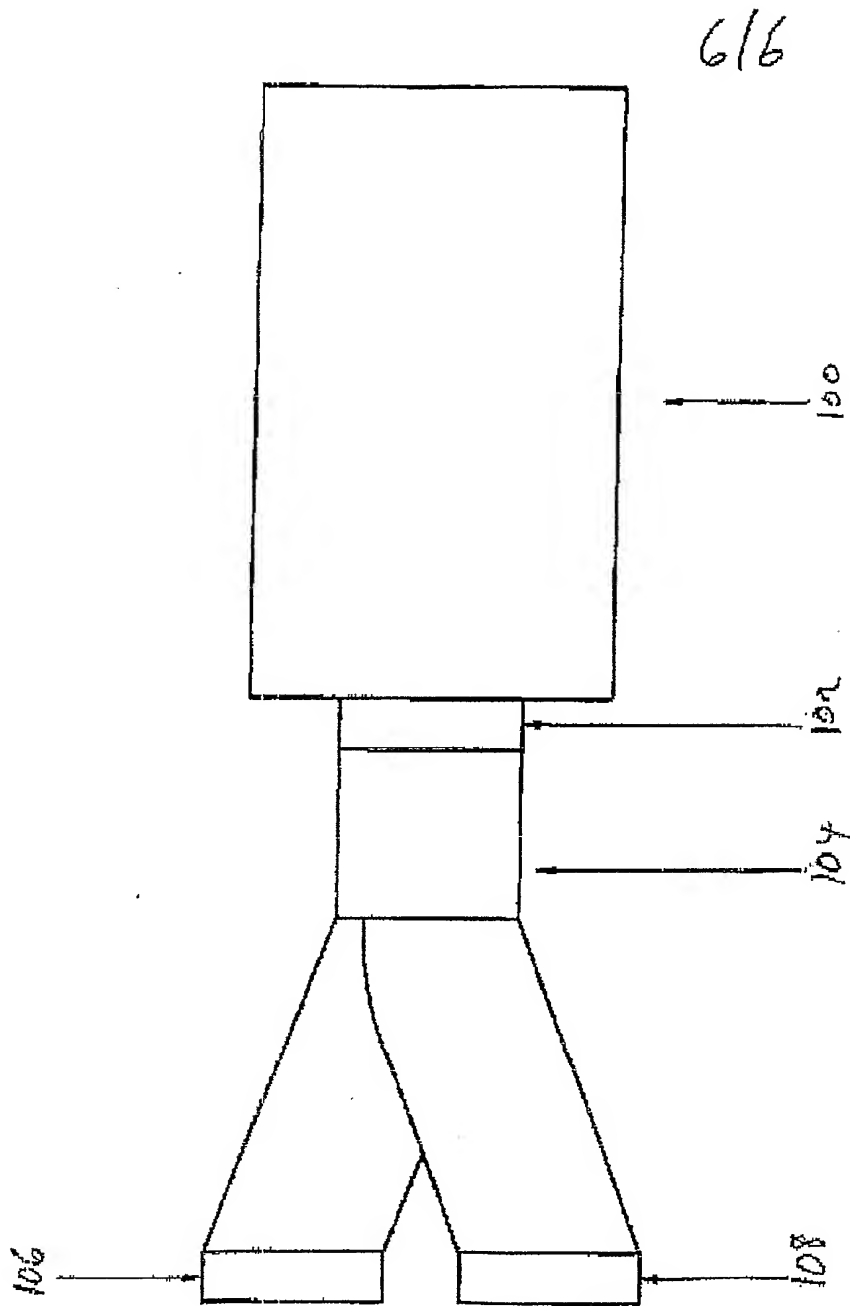


Fig. 6